









Pair your beacon to your app  $\underline{\text{prior}}\,\text{to}$  fitting to your bike or scooter.

Your beacon will not work until it has been paired.

# PAIR YOUR BEACON TO YOUR APP


If you don't pair your beacon, you will not receive notifications.

- 1 Open your RideScore app
- b. Select the Students icon
- c. Select Child then select Edit



- Select Camera position the phone above the QR code sticker on the beacon (your camera will automatically read the code)
- Select Save the beacon is now assigned to your child.

If you have more than one child, make sure you put the right beacon on the right child's bike or scooter. Then repeat the process for each registered child.

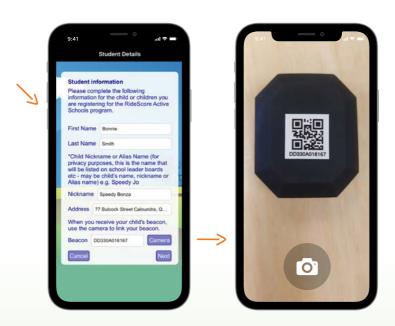

# ON ATT

## ONCE YOUR BEACON HAS BEEN PAIRED, ATTACH TO YOUR BIKE OR SCOOTER

Please note that beacons MUST be attached to a bike or scooter only. They will not work in school bags or on helmets.

### ATTACH YOUR BEACON TO YOUR BIKE

There are a number of locations on a bike where your beacon could be attached. This is dependent on the type and size of your bike.

Please do not remove your beacon once it is attached to your bike. We have specifically chosen a zip tie to attach the beacon to the bike for this reason, as it is very hard for a child to remove.

#### **Seat Post**

- Peel the white 3M paper backing off the beacon. Attach the beacon with the barcode on the outside, sticky side to the seat post.
- b. Wrap the zip tie above or below the barcode of the beacon. Do not wrap it over the barcode or number, as this pressure may turn your beacon off. Then tighten it securely to the seat post.
- c. Clip off any overhang of the zip tie, as it could rub on your child's leg.
- d. Check that the beacon is secure and is not moving around.





#### or Down Tube

- Peel the white 3M paper backing off the beacon. Attach the beacon with the barcode on the outside, sticky side to the frame.
- b. Wrap the zip tie above or below the barcode of the beacon. Do not wrap it over the barcode or number, as this pressure may turn your beacon off. Then tighten it securely to the down tube. Ensure you:
  - Haven't trapped any cables in or under the zip tie.
  - Place it high enough up the frame so your child's foot will not hit it as they pedal.
- Then clip off any overhang of the zip tie once you have pulled it tight, as it could rub on your child's leg.
- d. Check that the beacon is secure and is not moving around.







# ATTACH YOUR BEACON TO YOUR SCOOTER

There is only one location to attach your beacon to your scooter. Please see below.

Please do not remove your beacon once it is attached to your scooter. We have specifically chosen a zip tie as the tool to attach the beacon for this reason as it is very hard for a child to remove.

Pair your beacon to your app prior to fitting. Please note that beacons MUST be attached to a bike or scooter only. They will not work in school bags or on helmets.

#### **Steering Column**

- Peel the white 3M paper backing off the beacon. Secure your beacon to the steering column with the barcode facing out, sticky side to the steering column.
- b. Wrap the zip tie above or below the barcode of the beacon. Do not wrap it over the barcode or number, as this pressure may turn your beacon off. Then tighten it securely to the steering column.
- c. Clip off any overhang of the zip tie.
- d. Check that the beacon is secure and is not moving around.







Proudly partnered by



Proudly supported by





